


This baggage handling trolley has been designed in close co-operation with local handling companies and airlines. The trolley offers a long-lasting reliability, easy operation and low maintenance costs.

- Chassis made out of welded steel profiles.
- Loading platform made out of 2 waterproof plywood boards, V shaped, with gap in centre for escape of precipitation water.
- Fully hot-dip zinc-metallized, or painted.
- The drawbar has an eye 40 mm in diameter, and the rear hand operated hitch 30 mm in diameter.
- Front axle steered by turntable steering, rear axle fixed.



Loading platform size (mm)	Payload (kg)	Weight (kg)	Max. towing speed (km)
1000 x 2000	1000	200	25

Platform size and its payload can be modified according to customer requirements

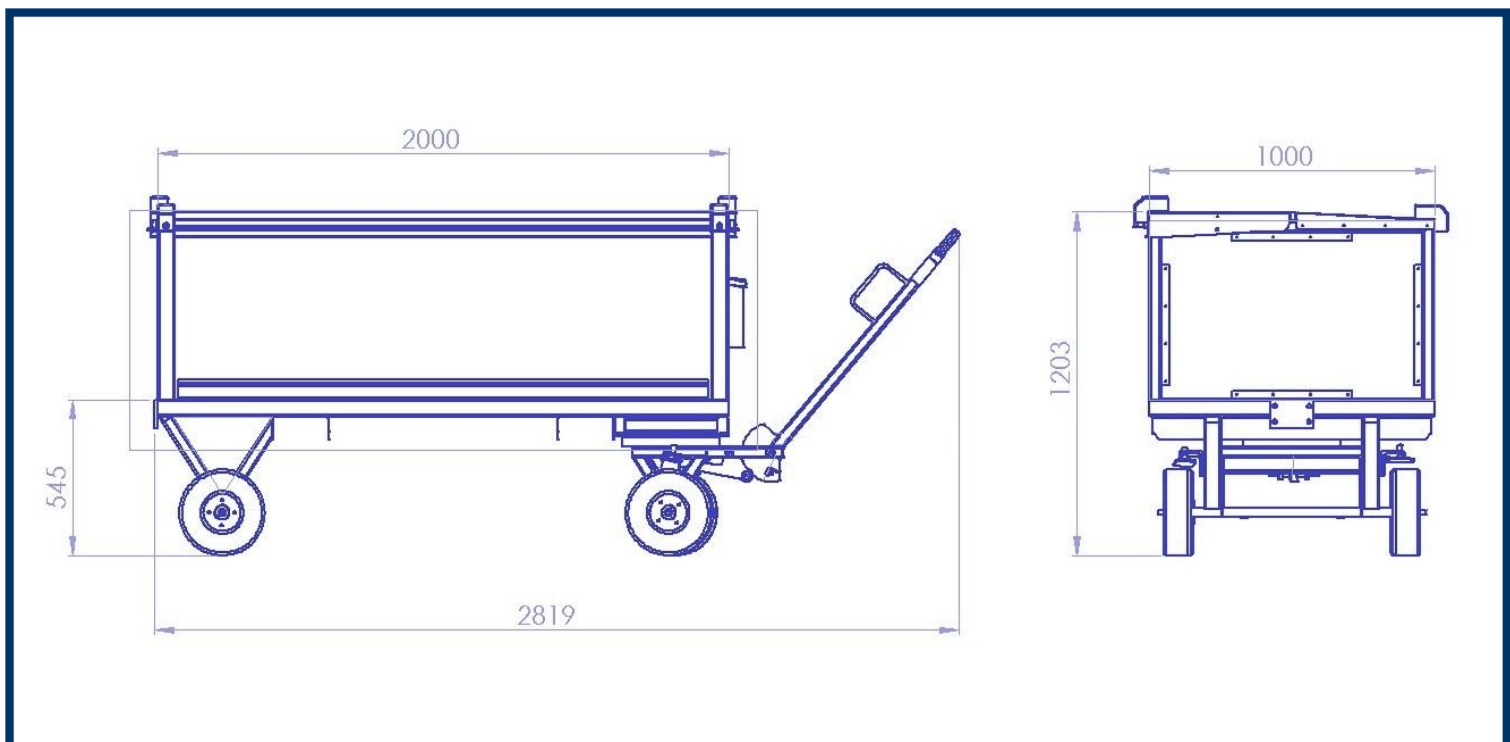

This product meets the EN 12312-11 standard

The chassis is equipped with a parking brake actuated by lifting and locking the drawbar in the upright position.



Manual self-locking E-type spring-loaded tow-hitch.
Rockinger tow-hitch available.



Optional versions and equipment

- White painting as a standard, other colours on demand
- Extended version



Compartment for storing of labels.



Transport arrangement

Up to 24 pieces can be transported by one low deck semitrailer truck.

