
These maintenance stairs features are: easy operation, long durability, reliability and low maintenance costs.

- low-weight optimized steel construction
- hot-dip galvanized in zinc bath and painted
- fixed or sliding platform handrails on both sides



Stairway width	Weight	Max. load per step	Side wind stability	Max. towing speed (km)
(mm)	(kg)	(kg)	(knots)	
1000	450	200	45	30

All dimensions can be modified on customer demand

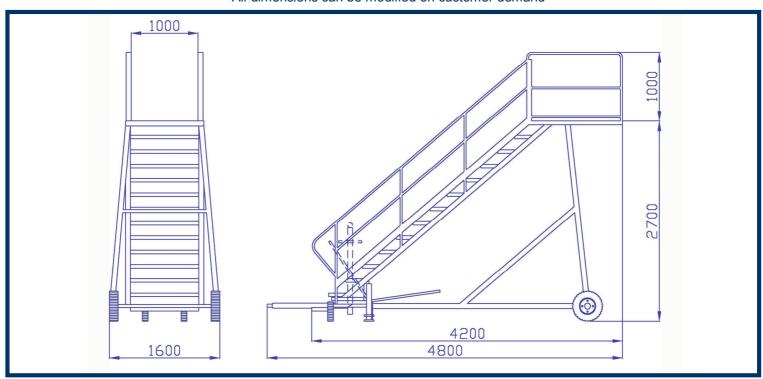

This product meets the EN 12312-8+A1 standard







The chassis is equipped with locking of the drawbar in the upright position.











Stability in the operational position is provided by two manually operated stabilizers.

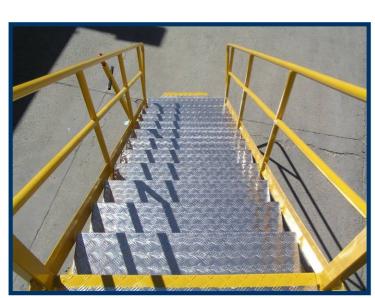



Steps and platform covered with aluminium antiskid sheet.

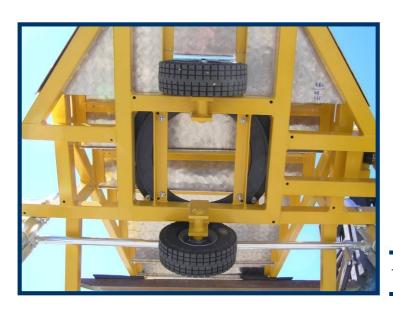



Turntable steering.





Platform and handrails front edge equipped with rubber bumper.



Front end of platform closed with chain.



4 wheels with steel discs, ball bearing hubs and solid rubber tyres.



Since the construction allows removal of the front axle frame, 2 pieces can be transported by 1 truck with about 7m of cargo space length.





Optional versions with sliding platform handrails.





Colour shade to be defined as per RAL colour chart.

