

ZODIAC

EQUIPMENT


TOILET SERVICE TRUCK TST1820

A suitable lorry chassis is chosen and offered to the customer according to the required size of the tank, superstructure equipment, cabin equipment and kind of drive unit. The aggregate of the superstructure is driven by PTO. The superstructure frame is made of galvanised and painted hollow sections. It is covered with a galvanised and painted sheet. Tanks are equipped with a level gauge and an inspection aperture for easy cleaning, disinfection and inspection. The superstructure is thermally insulated with expanded polystyrene.



Waste tank (litres)	Rinse tank (litres)	Pump capacity (litres/min)	Superstructure weight (kg)
1800	200	55	1350

Tanks quantity and their volume can be modified according to customer requirements

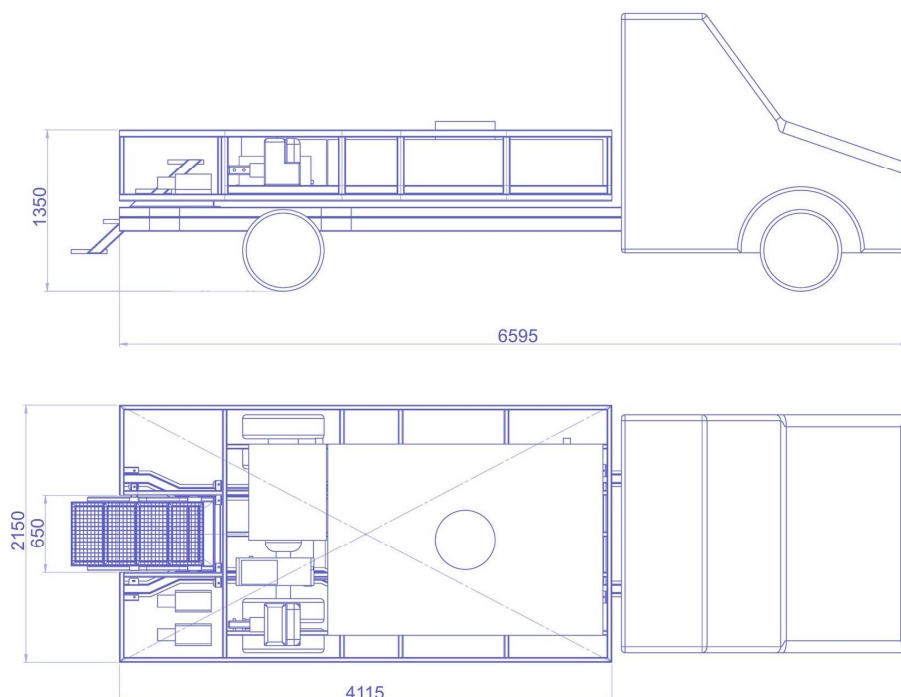

This product meets the EN 12312-13 standard

Control panels on rear side of superstructure.



Steps for easy access to the top of superstructure with bottom part removable for transport on public roads.



Unit is equipped with manual pump for emergency use.



The top wall with manholes with selectable diameter for tank's cleaning and inspecting is covered with aluminium with slip-resistant treatment. 5m waste hose with 4" coupler



Optional equipment

- Vacuum pump with automatic switch off when tank is full
- Diesel or petrol engine
- Battery charger
- Temperature measurement
- Independent Webasto heating system
- Automatic hose reel



ZODIAC EQUIPMENT

TOILET SERVICE TRUCK
TST1820

Optional versions

All dimensions can be changed on customer demand.



Ladder or lifting platform.



Superstructure for selectable truck chassis.

